

SD1000J

9.7"

TOUCH SCREEN
MONITOR

Multipile Interface
True Flat Screen

Wide Viewing Angle
1024 x 768 Resolution



OVERVIEW

VGA or HDMI or USB-C with Alt Mode.

Pole type, desktop stand, rear mount type to meet differnet environment request.

Capacitive touch as option.

Black or white chassis as standard.




SD1000J

9.7" TOUCH SCREEN MONITOR

		SD1000J-C (ALT Mode)	SD1000J-VH
Display Size		10 inch (4:3)	
Interface		USB-C(ALT Mode) + HDMI	VGA+HDMI
Resolution		1024x768	
Power Source		USB-C : Power by USB-C HDMI : DC 12V Adapter (1500mA)	DC 12V Adapter (1500mA)
Power Consumption		USB-C : 5V / 1A HDMI : DC 12V / 400mA	12V / 400mA
Active Area		196.6(H) x 147.4(V)mm	
Display Type		TFT-LCD (Wide viewing angle)	
Backlight		LED	
White Luminance		310 cd/m2	
Contrast Ratio		900	
Response Time Tr+Tf		20 msec	
Viewing Angle		178° (Horizontal)/178° (Vertical)	
Operating Temperature		0°C~40°C (Operating)	
Touch (Option)	Touch Function	Projective Capacitive Multi Touch	
	Input Method	Finger	
	Interface	USB	
	Glass Type	Toughened Glass	
	Optical Characteristics	Transparency > 85%	
Physical Dimension		242.7(W) mm x 187.2(L) mm x 30(D) mm	
VESA Mount		VESA 75 mm	
EMC / Safty Standards		FCC, CE	FCC, CE, Lot5

I/O TYPES

USB-C interface

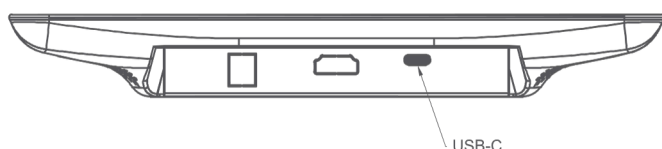

VGA+HDMI with touch interface

