


Display


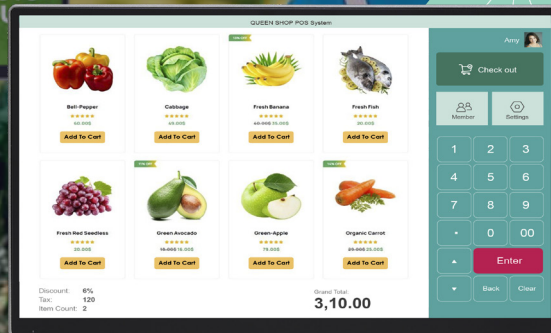


VariDisplay 256

15.6" True Flat Displays

Features

- 15.6" 16:9 Wide Full HD LCD (1920×1080, 350 nits).
- Slim Edge Bezel Design (4.8mm).
- USB-C Interface.
- Durable Die-Cast Aluminum construction.
- Best Choice for Space Limited Retail / Hospitality Environments.
- True Flat Designed to Suit Harsh Environment.
- Pcap 10-Point Touch Screen.
- Support VESA 75x75 for Pole or Wall-mount installation.
- Dual Hinge Base Stand Available.

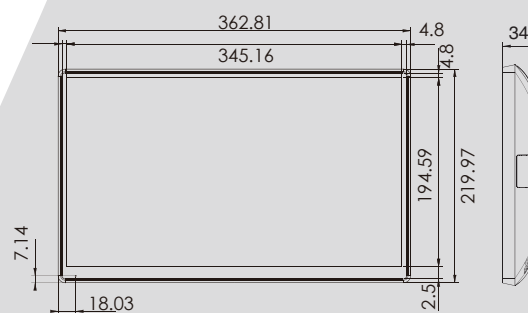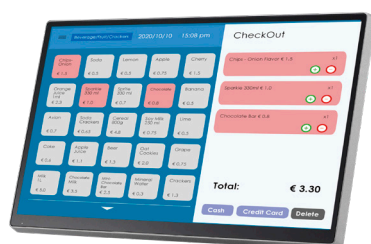

Specification

Model name		VariDisplay256	
Description		15.6" True Flat P-Cap Display	
Display	Display size	15.6" (16:9)	
	True-Flat	Yes	
	Interface	Displayport, VGA, USB-C	
	Optimal Resolution	1920×1080	
	Viewing angle	170 degrees (H) ; 170 degrees (V)	
	Brightness (Panel)	350	
	Contrast Ratio	1000:1	
	Response Time (ms)	20 ms (typ)	
	Power supply	USB-C (Support up to 4M), AC Adapter	
	Active Area	344.16 (H) x 193.59 (V)	
Color Arrangement		RGB-stripe	
Touch type		True Flat P-Cap Technology	
Optional Peripheral (USB I/F)		MSR / Fingerprint Reader / iButton Reader / 2D Scanner	
VESA Mount		75 x 75	
Physical Dimension (WxHxD mm)		362.8 x 217.9 x 34 mm	
Environment	Operating Condition		Temperature: 0℃ ~ 40℃
			Humidity: 20% ~ 80% RH, non-condensing
	Storage Condition		Temperature: -10℃ ~ 50℃
			Humidity: 10% ~ 90% RH, non-condensing
Certification EMI/Safety		CE, FCC, LVD	

Contact

5F, No.59, Ln. 77, Xing-Ai Rd., Neihu Dist., Taipei City 114, Taiwan. R.O.C

☎ +886 2 7721 4688 📠 +886 2 7721 2289 ✉ sales@poindus.com