

PRIMELCO 
SYSTEM DEVICE

TAB-276

New 2-in-1 Hybrid Mobile POS



The Power of 2-in-1 Hybrid Mobile POS

TAB-276 Series is thoughtfully designed as a versatile convertible system, seamlessly transitioning from an all-in-one POS to a mobile tablet, offering enhanced adaptability for diverse operational needs

Fixed POS



Mobile Tablet



Unleash Power and Versatility

Crafted with Intel® Elkhart Lake processor, TAB-276 Series delivers enhanced performance and efficiency. With seamless compatibility across Windows, Linux, and Android, it ensures flexibility and reliability for all your operational needs.



Brilliant Display

The TAB-276 Series offers two touchscreen display sizes, enabling you to select the ideal fit for your operational needs and preferences.

PRIMELCO 
SYSTEM DEVICE

13.3"

11.6"





Left/Right: 180 degrees
Up/Down: 17 degrees

**Swivel
to Engage**







**Connect to
Businesses**



3 Trigger Keys

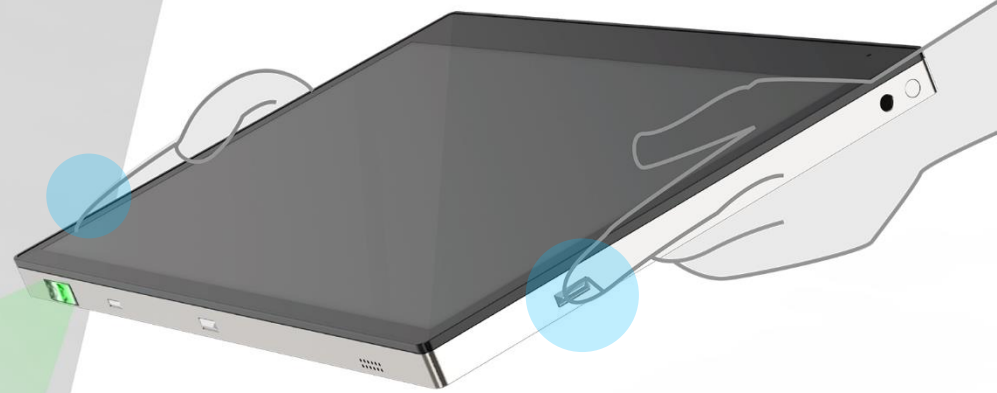

2D Scanner

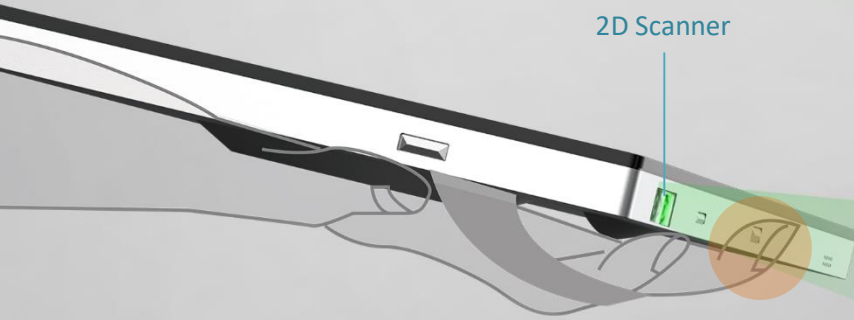

**Capture Data or
Transact**


2D scanner

Excellent on-the-go experience

PRIMELCO
SYSTEM DEVICE

1

Hand Strap

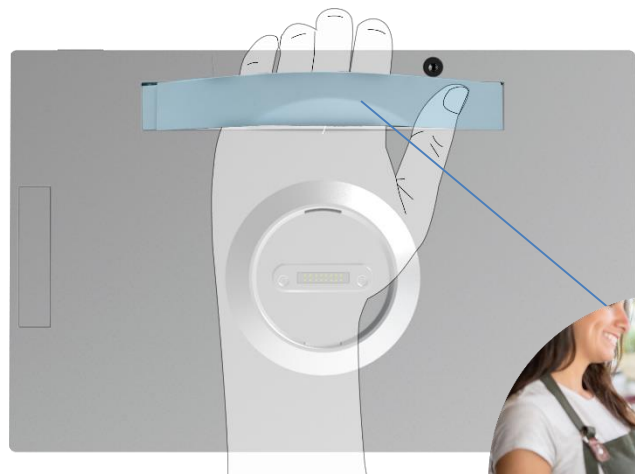

2

Shoulder Strap



Extend Your Service

PRIMELCO 
SYSTEM DEVICE



1x USB2.0

Kensington lock

1x DC JACK

1x USB2.0 Type C

2x USB2.0

2x DB9

1x 12V Powered USB
1x 24V Powered USB

1x RJ11 Cash Drawer

1x RJ45 LAN

**Premium Stand
for Expandability**

Specifications

System	Motherboard	F33
	Processor	Intel® Elkhart Lake Celeron J6412
	Memory	8GB DDR4
	Storage	128GB eMMC
Display	Size and Resolution	M276: 11.6" 1920 x 1080 (Full HD)
		M278: 13.3" 1920 x 1080 (Full HD)
I/O Ports (Tablet)	Touch Screen	True-Flat PCAP multi-Touch
	USB Type-C	1x USB3.0 (data transfer only)
I/O Ports (Basic Stand)	DC Jack	1x 2PIN
	USB Type-A	3x USB2.0
	USB Type-C	1x USB2.0
	Powered USB	1xPowered USB 12V, 1xPowered USB 24V
	Serial Port	2x DB9 (default 0V, 5V;12V)
	LAN	1x RJ45 (10/100 Mbps)
	Cash Drawer	1x RJ11
Control	DC Jack	1x 4PIN
	Sensor	G-sensor
Audio	Microphone	1
	Speaker	1x 1W
Battery & Power	Battery	3.85V 7000mAh
	Power Adapter	120W / 19V (tablet charging through stand only)
Communication	Wireless LAN + BT	WiFi 6 + BT5.2
Certificate	EMC & Safety	FCC Class B, CE Mark Class B, LVD, RF
Environment	Operating Temperature	0°C ~ 40°C (32°F ~ 104°F) (without charging)
		0°C ~ 35°C (32°F ~ 95°F) (charging)
Dimensions	Humidity	20% ~ 80% RH non-condensing
		M276: 276 x 179 x 15.4 mm (10.9" x 7" x 0.6")
Weight	W x H x D	M278: 312.5 x 200 x 15.4 mm (12.3" x 7.9" x 0.6")
		M276: 800g (1.76 lbs)
Peripherals (Option)	Weight	M278: 980g (2.16 lbs)
	Scanner	2D Scanner
	MSR	3-Track MSR
	iButton	iButton
	Fingerprint	Fingerprint Reader
	RFID	RFID Reader
OS Supported	Rear Camera	1x SMP (*Rear camera is available for specific project requirements)
	Supported OS	Windows 10 IoT Enterprise, Linux, Android 12.0

※ Product specifications and data are subject to change without notice.

27X Series | TAB-276/278

New 2-in-1 Hybrid Mobile POS

